




# Nvidia Shield Battery Assembly Replacement

This will be a step-by-step guide to take out and replace the battery assembly from the Nvidia Shield.

Written By: Andrew Barbanera

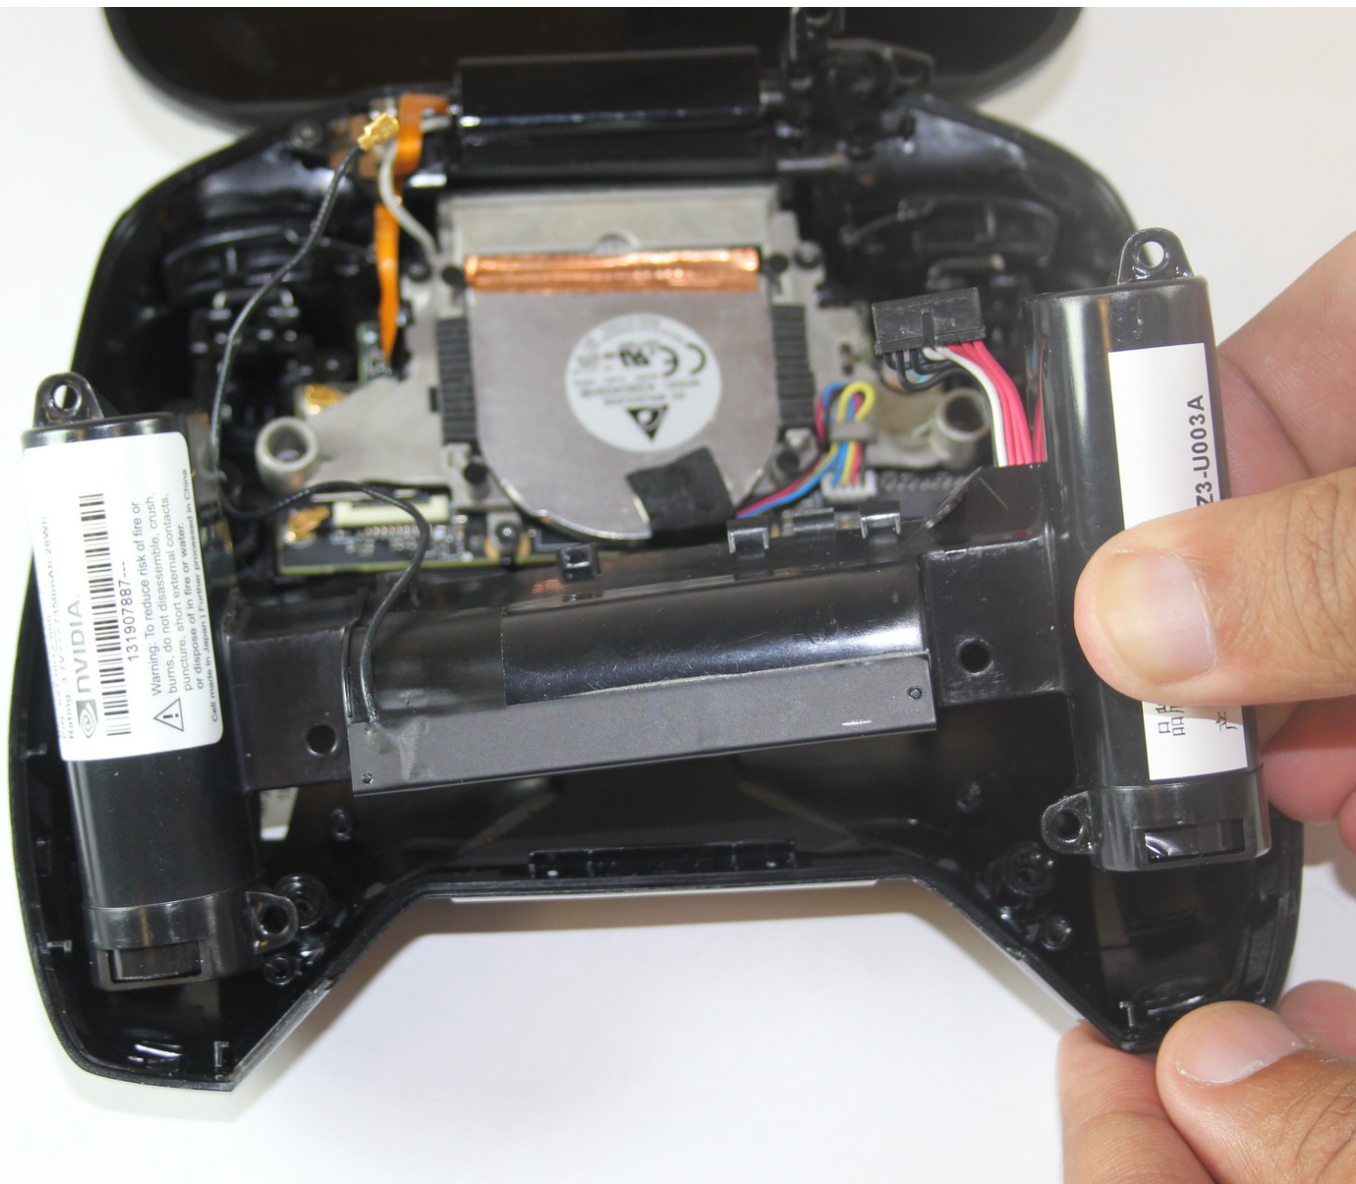




## TOOLS:


- [T5 Torx Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Remove Front Panel

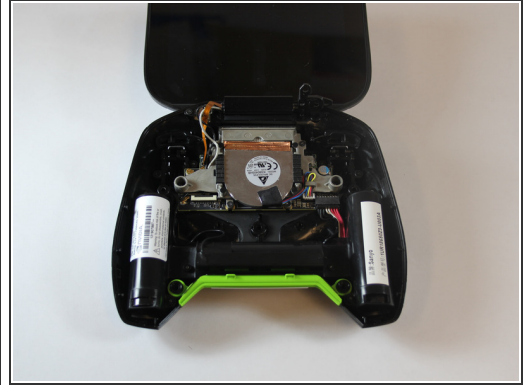

- Unscrew the 7 6.4mm T5 Torx screws from back panel
- Use spudger to separate front and back panels


## Step 2 — Remove Green Grill

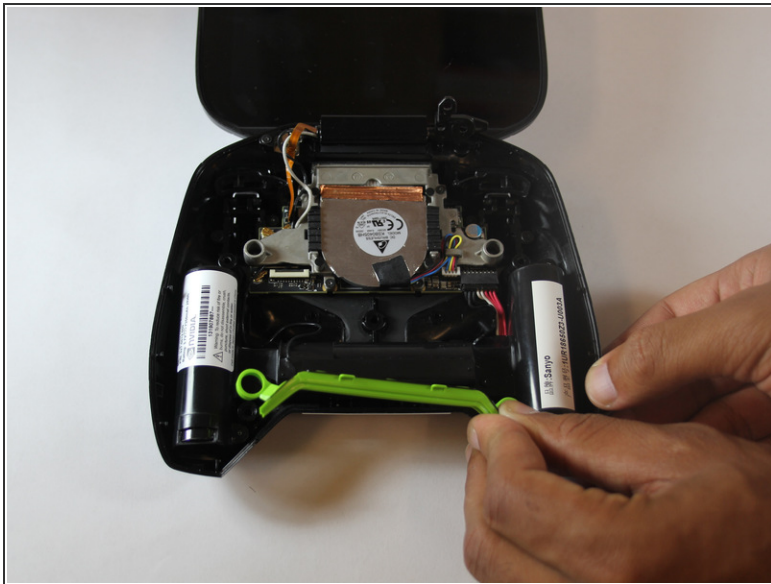

- The green grill is not screwed in so it can be pulled right out.



### Step 3 — Remove Battery Cables

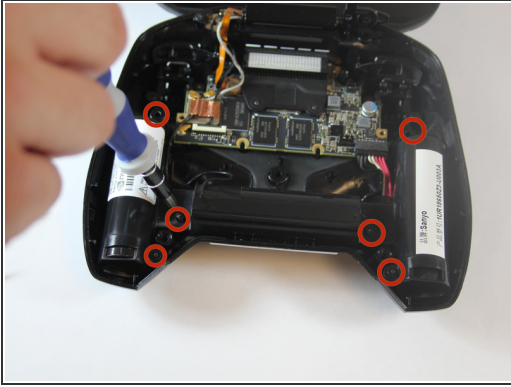

- Remove the 6 6.5mm T5 Torx screws.
- Remove power wires.
- Peel back copper tape and remove black and white wires.

### Step 4 — Remove Battery Apparatus



- Once all cables are removed, pull the battery apparatus out.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 06:51:49 PM.